

art. 132

Attuatore pneumatico semplice effetto

Pneumatic cylinder s. e.

Verin pneumatique s. e.

Pneumatischer Antrieb l. f.



art. 133

Attuatore pneumatico doppio effetto

Pneumatic cylinder d. e.

Vverin pneumatique d. e.

Pneumatischer Antrieb l. l.

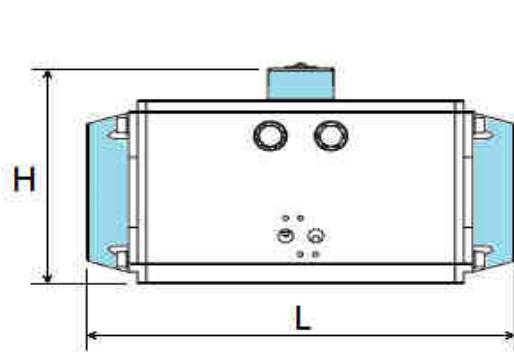

MODELLO		A	H	L	Foratura ISO 5211	ABBINAMENTO	
						VALVOLA SFERA	VALVOLA FARFALLA
DE 50	DOPPIO EFFETTO DOUBLE EFFECT	71	90	154	F03-F05	DN 25	DN 25/32/40
DE 65		90	109	189	F05-F07	DN 32/40	DN 50
DE 75		103	120	210	F05-F07	DN 50	DN 65/80
DE 85		113	133	229	F05-F07	DN 65/80	DN 100
DE 110		139	156	266	F07-F10	DN 100	
SE 50	SEMPLICE EFFETTO SIMPLE EFFECT	71	90	154	F03-F05	DN 25	
SE 65		90	109	189	F05-F07	DN 32	DN 25/32/40/50
SE 75		103	120	210	F05-F07	DN 40/50	DN 65
SE 85		113	133	229	F05-F07	DN 65	DN 80/100
SE 110		139	156	266	F07-F10	DN 80	
SE 125		157	191	337	F07-F10	DN 100	
Materiale: inox - alluminio							

Accessori disponibili / Available accessories / Accessoires disponibles / Verfügbares Zubehör:

- Box Micro (meccanico / induttivo) / Limit switch box (mechanical/inductive)
- Micro induttivi esterni / external inductive micro switches
- Elettrovalvola / solenoid valve / electrovalve / magnetventil
- Indicatore visivo di posizione / visual position indicator / indicateur visuel de position / optische stellungsanzeige

art. 133L (PER ATTUATORE VERTICALE)

Control box con luce di posizione led verde/rossa

Control box with green / red led lights

Control box avec led vertes / rouges

Control box mit grün/rot LED-Positionslicht

Compatibile con / Compatible with/compatible avec/kompatibel mit attuatore pneumatico verticale semplice effetto SE / Vertical pneumatic cylinder SE
2 micro meccanici - 2 micro mechanics 2 micromécanique - 2 Mikromechanik
alimentazione/supply/source de courant/Stromversorgung 24 VDC
Completo di/complete/complet/komplett Elettrovalvola monostabile/monostable solenoid valve électrovanne monostable/monostabile Magnetventil



art. 159 (PER ATTUATORE ORIZZONTALE)

Box micro con indicatore visivo

Limit Switch Box

Limit Switch Box

Limit Switch Box

Compatibile con / Compatible with/compatible avec/kompatibel mit attuatore pneumatico orizzontale / horizontal pneumatic cylinder
2 micro meccanici/induttivi - 2 micro mechanics/inductives 2 micromécanique/inductive - 2 Mikromechanik/induktive
alimentazione/supply/source de courant/Stromversorgung 250V AC/3A - 125V AC/5A - 250V DC/0,2A - 125V DC/0,4A - 30V DC/4A
indicatore di posizione tridimensionale / three-dimensional locator localisateur tridimensionnel / dreidimensionale Locator



art. 157 (PER ATTUATORE ORIZZONTALE)

Elettrovalvola NAMUR

Solenoid valve NAMUR

Electrovanne NAMUR

Magnetventil NAMUR

Compatibile con / Compatible with/compatible avec/kompatibel mit attuatore pneumatico orizzontale / horizontal pneumatic cylinder
Monostabile (3/2) - bistabile (5/2) / Monostable (3/2) - bistable (5/2) Monostable (3/2) - bistables (5/2) / Monostable (3/2) - bistable (5/2)

